

# TECHNICAL SAFETY DATA SHEET (V7) Semi-Automatic Model

10/01/23

## Product Description

### SPECIFICATIONS

4-season safety cover that complies with the **AFNOR regulation NF P90-308 December 2013**



- **Manipulation :**
  - Portable control box equipped with 2 batteries 12V 5,5 Ah
  - Independent charger to plug into an electrical outlet 220 V
  - Ratchet spanner only in case of an electrical failure



- **Membrane :** PVC pre-stressed membrane
- **Belt :** Polyurethane with stainless steel cables
- **Mechanical :** All the metallic parts involved in the security are in anodized aluminium and 316 stainless steel
- **Rails :** Anodized aluminium
- **Casing :** Polyester powder-coated aluminium, matt finished of **Ral colour 7037** (standard)




- **Length :** min 2 meters -> max 24 meters
- **Width :** min 2 meters -> max 8,5 meters (depending on the length of the cover)<sup>1</sup>




- **Speed :** Closing/opening time : 60 seconds for a length of 13 meters


### AVAILABLE COLOURS OF THE MEMBRANE



RAL 7035  
Light Grey



RAL 7037  
Dust Grey




RAL 6026  
Opal Green



RAL 5002  
Ultramarine Blue



RAL 5015  
Sky Blue



RAL 1015  
Light Ivory






RAL 9005  
Pure Black

### AVAILABLE OPTIONS

- All-terrain rail (RTT) 72,0 mm x 10,6 mm (unregular surface or low density)
- The casing is available in all RAL K7 Classic paints except for fluo and metallic paints.
- Mechanical closing sensor

### MEASURES (in mm)

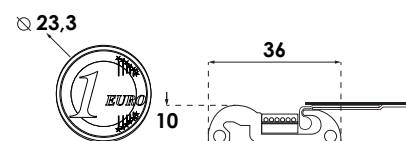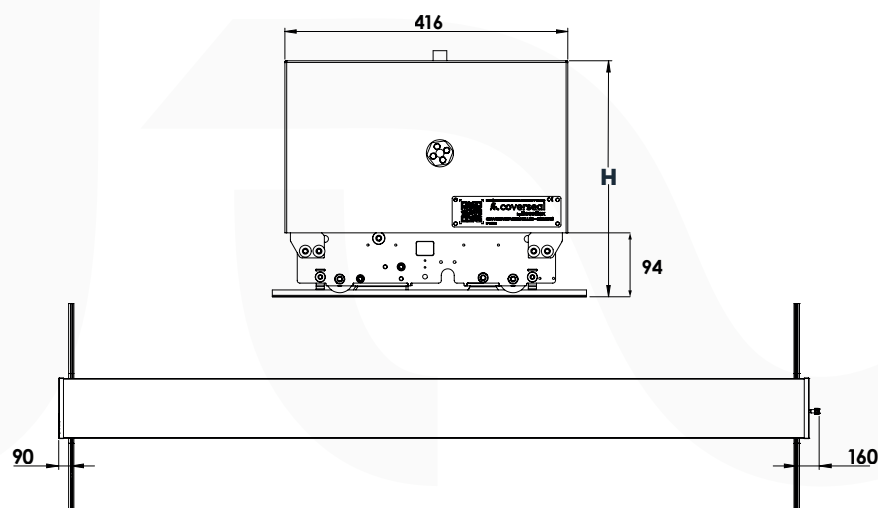

afnor



**Technical Data Sheet: Semi-Automatic Model**  
Cover 102 in compliance with the Afnor NF P90-308 standard of December 2013 - LNE certified

**coverseal**